

# Multi-Resolution Analysis for the Haar Wavelet

HELMUT KNAUST

DEPARTMENT OF MATHEMATICAL SCIENCES  
UNIVERSITY OF TEXAS AT EL PASO  
EL PASO TX 79968-0514

Last edits: March 26, 2009

## 1 The space $L^2([0, 1])$ and its scalar product

We will denote by  $L^2([0, 1])$  the vector space of all functions  $f : [0, 1] \rightarrow \mathbb{R}$  satisfying<sup>1</sup>

$$\int_0^1 |f(x)|^2 dx < \infty. \quad (1)$$

On  $L^2([0, 1])$  one can define a SCALAR PRODUCT as follows:

$$\langle f, g \rangle = \int_0^1 f(x) \cdot g(x) dx. \quad (2)$$

Similarly to the case of  $\mathbb{R}^n$ , the scalar product automatically defines a NORM on  $L^2([0, 1])$  via the definition

$$\|f\| = \sqrt{\langle f, f \rangle} = \sqrt{\int_0^1 |f(x)|^2 dx} \quad (3)$$

Finally, we say that a sequence  $(f_n)$  of functions in  $L^2([0, 1])$  converges to a function  $f(x) \in L^2([0, 1])$  IN THE  $L^2$ -SENSE, if

$$\lim_{n \rightarrow \infty} \|f_n - f\| = 0 \quad (4)$$

## 2 Orthonormal sets

We say that a set  $B$  of elements in  $L^2([0, 1])$  is an ORTHONORMAL SET, if the scalar product of each element in  $B$  with itself equals 1, and the scalar product of two different elements in  $B$  is equal to 0:

1.  $\langle f, f \rangle = 1$  for all  $f \in B$
2.  $\langle f, g \rangle = 0$  for all  $f, g \in B$  satisfying  $f \neq g$ .

---

<sup>1</sup>More precisely: those functions on  $[0, 1]$  whose square is Lebesgue-integrable. Since we will ultimately be interested in the discrete case anyway, you can safely replace “Lebesgue-integrable” by “Riemann-integrable”.

An orthonormal set  $B$  is automatically linearly independent.<sup>2</sup>

Our **ultimate goal** will be to find a particular orthonormal set  $B = \{f_1(x), f_2(x), \dots\}$  such that we can approximate every function  $f(x) \in L^2([0, 1])$  by linear combinations of the elements in  $B$ ; more precisely, given  $f(x) \in L^2([0, 1])$ , we will be able to find scalars  $(a_k)$  such that the sequence

$$\left( \sum_{k=1}^n a_k f_k(x) \right) \tag{5}$$

converges to  $f(x)$  in the  $L^2$ -sense.<sup>3</sup>

### 3 The Haar scaling function

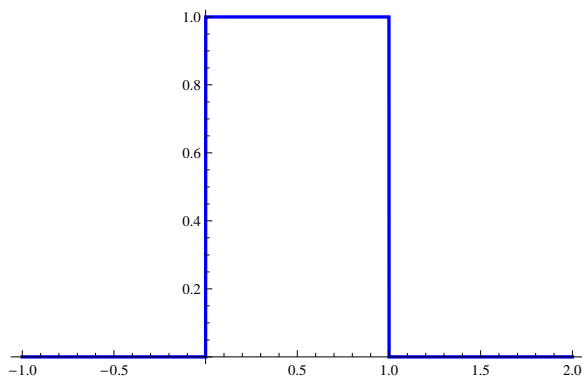


Figure 1: The Haar scaling function  $\phi(x)$

We denote by  $\phi(x)$  the following function:

$$\phi(x) = \begin{cases} 1, & \text{if } x \in [0, 1) \\ 0, & \text{if } x < 0 \text{ or } x \geq 1 \end{cases} \tag{6}$$

---

<sup>2</sup>Indeed assume that  $f(x) = a_1 g_1(x) + a_2 g_2(x) + \dots + a_n g_n(x)$  for some real numbers  $a_1, a_2, \dots, a_n$  and some distinct elements  $f(x), g_1(x), g_2(x), \dots, g_n(x)$  in  $B$ . Then

$$\langle f, f \rangle = \langle a_1 g_1 + a_2 g_2 + \dots + a_n g_n, f \rangle$$

We can expand the right side to obtain

$$\langle f, f \rangle = a_1 \langle g_1, f \rangle + a_2 \langle g_2, f \rangle + \dots + a_n \langle g_n, f \rangle$$

This can't be true, because the left side is 1, while the right side equals 0.

<sup>3</sup>We basically already know one example of such a set: It is known that the set

$$F = \left\{ \frac{1}{\sqrt{2\pi}}, \frac{1}{\sqrt{\pi}} \cos(x), \frac{1}{\sqrt{\pi}} \cos(2x), \dots, \frac{1}{\sqrt{\pi}} \sin(x), \frac{1}{\sqrt{\pi}} \sin(2x), \dots \right\}$$

forms an orthonormal set with which we can approximate all elements in  $L^2([-\pi, \pi])$  in this fashion.

$\phi : \mathbb{R} \rightarrow \mathbb{R}$  is called the HAAR SCALING FUNCTION, or the Haar “father” wavelet. Through-

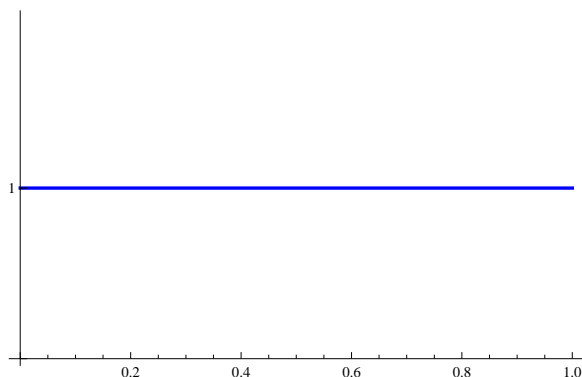


Figure 2: The Haar scaling function  $\phi(x)$  restricted to  $[0, 1)$

out we will identify  $\phi(x)$  with its restriction to  $[0, 1)$ .

Let  $V_0$  denote the one-dimensional vector space spanned by  $\phi(x)$ ; this is nothing else but the set of all functions constant on  $[0, 1)$  (and vanishing elsewhere).

Next we consider the functions  $2^{1/2}\phi(2x)$  and  $2^{1/2}\phi(2x-1)$ . They span a two-dimensional

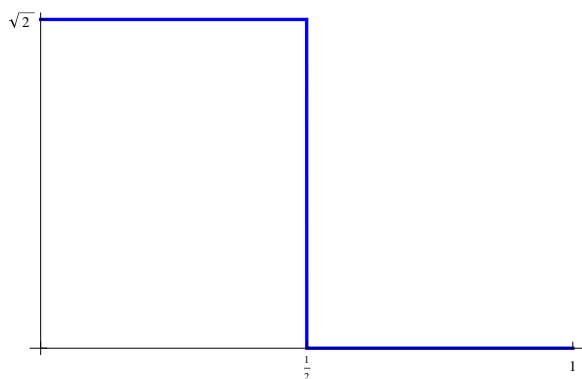


Figure 3: The function  $2^{1/2}\phi(2x)$

vector space, denoted by  $V_1$ , consisting of all functions on  $[0, 1)$  that are constant both on  $[0, \frac{1}{2})$  and on  $[\frac{1}{2}, 1)$ . Note that  $V_0 \subset V_1$ .

Continuing in this fashion, we can define a  $2^j$ -dimensional vector space  $V_j$ , spanned by the functions

$$2^{j/2}\phi(2^jx), 2^{j/2}\phi(2^jx - 1), \dots, 2^{j/2}\phi(2^jx - (2^j - 1)).$$

The vector space  $V_j$  consists of all functions on  $[0, 1)$  that are constant on intervals of the form  $[k2^{-j}, (k+1)2^{-j})$  for  $k = 0, 1, 2, \dots, 2^j - 1$ . Figure 5 shows the function  $2^{3/2}\phi(2^3x - 5)$  contained in  $V_3$ . We have  $V_0 \subset V_1 \subset \dots \subset V_j \subset \dots$ .

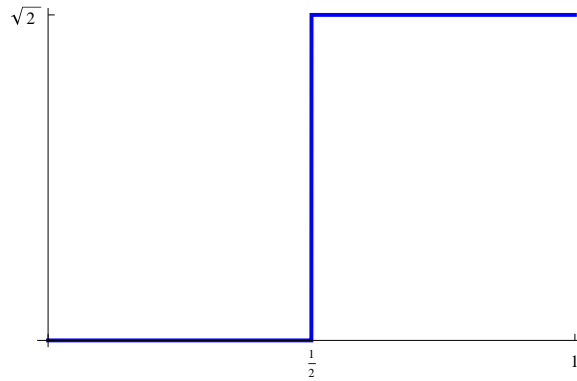


Figure 4: The function  $2^{1/2}\phi(2x - 1)$

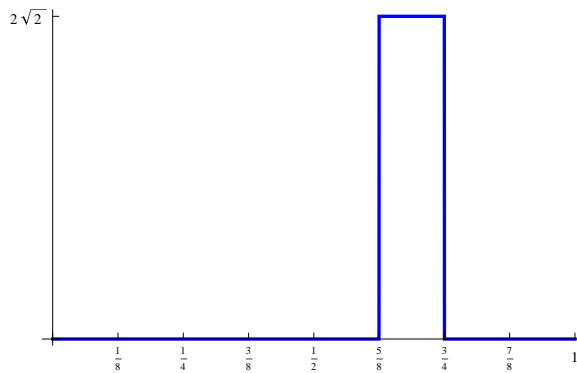


Figure 5: The function  $2^{3/2}\phi(2^3x - 5)$

You should have wondered by now why the factor  $2^{j/2}$  is included. The answer is straightforward: this way the functions form an orthonormal set!

### Exercise 1

Show that the set  $\{2^{j/2}\phi(2^jx), 2^{j/2}\phi(2^jx - 1), \dots, 2^{j/2}\phi(2^jx - (2^j - 1))\}$  forms an orthonormal set of functions in the vector space  $V_j$ .

## 4 Using $V_j$ to approximate functions in $L^2([0, 1])$

A function  $f \in V_j$  has the form

$$f(x) = a_0 2^{j/2} \phi(2^j x) + a_1 2^{j/2} \phi(2^j x - 1) + \dots + a_{2^j - 1} 2^{j/2} \phi(2^j x - (2^j - 1)). \quad (7)$$

Since the functions on the right side form an orthonormal set, the coefficients  $a_k$  are given by the formula

$$a_k = \langle f(x), 2^{j/2} \phi(2^j x - k) \rangle = \int_0^1 f(x) \cdot 2^{j/2} \phi(2^j x - k) dx \quad (8)$$

### Exercise 2

Take the scalar product with  $2^{j/2} \phi(2^j x - k)$  on both sides of (7) to verify Formula (8).

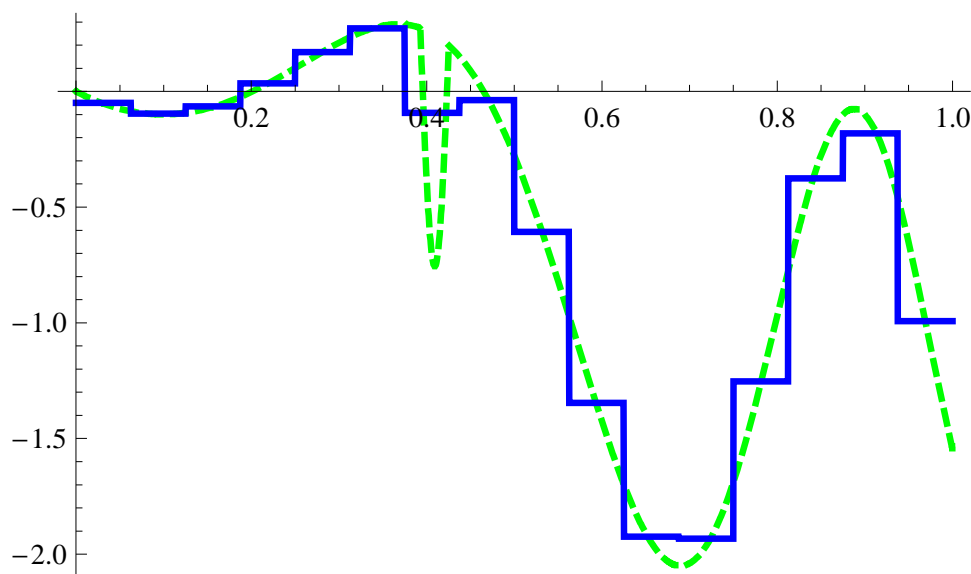


Figure 6: Approximating a function by an element in  $V_4$

The same formula for the coefficients can be used to approximate functions in  $L^2([0, 1])$  by a function in  $V_j$ . Let  $f(x)$  be a function in  $L^2([0, 1])$ , and set

$$f_j(x) = a_0 2^{j/2} \phi(2^j x) + a_1 2^{j/2} \phi(2^j x - 1) + \cdots + a_{2^j - 1} 2^{j/2} \phi(2^j x - (2^j - 1)), \quad (9)$$

where the coefficients  $a_k$  are computed via Formula (8).

Alfred Haar (1885–1933) showed in 1910 that, if  $f(x)$  is continuous, the sequence  $(f_j(x))$  converges to  $f(x)$  uniformly. If, on the other hand,  $f(x) \in L^2([0, 1])$ , then

$$\lim_{j \rightarrow \infty} \|f - f_j\| = 0.$$

Figures 6 and 7 show the approximation of a function (dashed line) by an element in  $V_4$  and  $V_7$ , respectively (solid line).

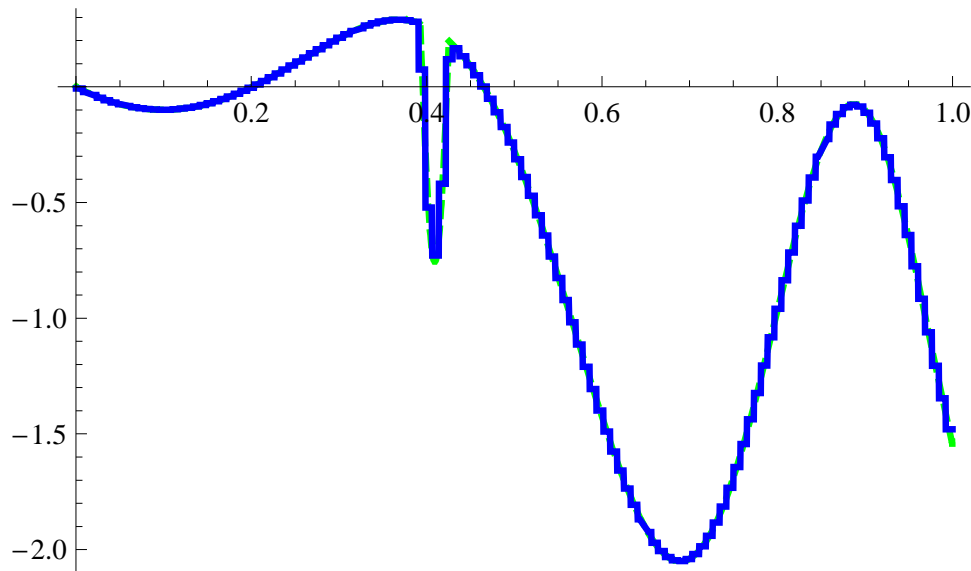


Figure 7: Approximating a function by an element in  $V_7$

While we have found nice orthonormal bases for all the vector spaces  $V_j$ , we still fall short of our goal: If we take two basis elements from different  $V_j$ 's, their scalar product will not necessarily equal zero, because the intervals where the basis elements are equal to 1 may overlap.

## 5 The Haar wavelet

Let's see whether we can remedy this deficiency step by step. We want to find a function  $\psi(x)$  in  $V_1$ , such that the linear combinations of  $\phi(x)$  and  $\psi(x)$  span the vector space  $V_1$ , and such that the following conditions are satisfied:

1.  $\langle \phi, \psi \rangle = 0$
2.  $\langle \psi, \psi \rangle = 1$

Since  $\psi \in V_1$  we can find scalars  $a_1$  and  $a_2$  such that

$$\psi(x) = a_1\sqrt{2}\phi(2x) + a_2\sqrt{2}\phi(2x - 1). \quad (10)$$

Note also that

$$\phi(x) = \phi(2x) + \phi(2x - 1). \quad (11)$$

Using (10) and (11), the first condition becomes

$$\langle \phi, \psi \rangle = \langle \phi(2x) + \phi(2x - 1), a_1\sqrt{2}\phi(2x) + a_2\sqrt{2}\phi(2x - 1) \rangle = a_1/\sqrt{2} + a_2/\sqrt{2} = 0, \quad (12)$$

so  $a_2 = -a_1$ . The second condition yields:

$$\langle \psi, \psi \rangle = \langle a_1\sqrt{2}\phi(2x) + a_2\sqrt{2}\phi(2x-1), a_1\sqrt{2}\phi(2x) + a_2\sqrt{2}\phi(2x-1) \rangle = a_1^2 + a_2^2 = 1, \quad (13)$$

Solving (12) and (13) for  $a_1$  and  $a_2$ , we obtain<sup>4</sup>

$$\psi(x) = \phi(2x) - \phi(2x-1) = \begin{cases} 1, & \text{if } x \in [0, \frac{1}{2}) \\ -1, & \text{if } x \in [\frac{1}{2}, 1) \\ 0, & \text{otherwise} \end{cases} \quad (14)$$

The function  $\psi(x)$  is called the HAAR “MOTHER” WAVELET; its graph is depicted in Fig-

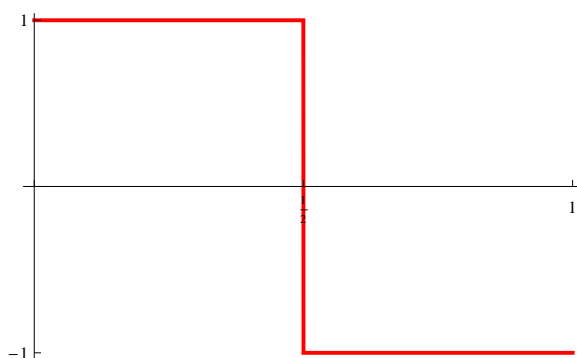


Figure 8: The Haar mother wavelet  $\psi(x)$

ure 8.

We will denote the vector space spanned by the function  $\psi(x)$  as  $W_0$ . It is customary to write

$$V_1 = V_0 \oplus W_0. \quad (15)$$

Here the symbol  $\oplus$  is used to indicate that each element in  $V_1$  can be written in a unique way as the sum of an element in  $V_0$  and an element in  $W_0$  and that the scalar product of any element in  $V_0$  with any element in  $W_0$  equals zero.

### Exercise 3

Show that the functions  $\sqrt{2}\psi(2x)$  and  $\sqrt{2}\psi(2x-1)$  are elements in  $V_2$ .

<sup>4</sup>There are actually two solutions; it suffices for us to consider the solution for which  $a_1 > 0$ . Why?

**Exercise 4**

Show that the set  $\{\sqrt{2}\psi(2x), \sqrt{2}\psi(2x - 1)\}$  forms an orthonormal set.

**Exercise 5**

Show that  $\langle \sqrt{2}\psi(2x), f(x) \rangle = 0$  for all functions  $f(x) \in V_1$ . (The same result holds for  $\sqrt{2}\psi(2x - 1)$ .)

These two functions are shown in Figures 9 and 10, respectively.

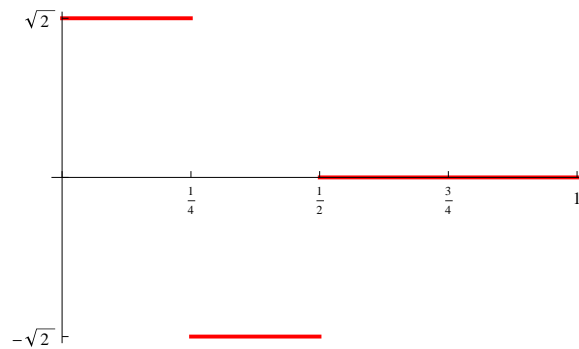


Figure 9: The function  $\sqrt{2}\psi(2x)$  in  $W_1$

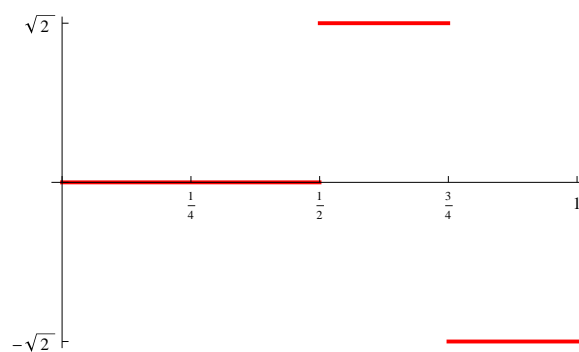


Figure 10: The function  $\sqrt{2}\psi(2x - 1)$  in  $W_1$



Let's denote the vector space spanned by  $\sqrt{2}\psi(2x)$  and  $\sqrt{2}\psi(2x - 1)$  as  $W_1$ . The three exercises above show that

$$V_2 = V_1 \oplus W_1 = V_0 \oplus W_0 \oplus W_1, \quad (16)$$

meaning once again that each element in  $V_2$  can be written in a unique way as the sum of an element in  $V_1$  and an element in  $W_1$  and that the scalar product of any element in  $V_1$  with any element in  $W_1$  equals zero.

Continuing in this fashion, we can write

$$V_{j+1} = V_j \oplus W_j, \quad (17)$$

where  $W_j$  is the vector space spanned by the functions

$$2^{j/2}\psi(2^j x), 2^{j/2}\psi(2^j x - 1), \dots, 2^{j/2}\psi(2^j x - (2^j - 1)).$$

The formula

$$V_j = V_0 \oplus W_0 \oplus W_1 \oplus \dots \oplus W_{j-1}$$

is called MULTI-RESOLUTION ANALYSIS.

## 6 A discrete example

A function in  $V_4$  is determined by its 16 coefficients. Suppose the vector of coefficients is

$$(180, 167, 244, 190, 159, 242, 176, 192, 168, 250, 175, 219, 193, 232, 200, 234) \quad (18)$$

The corresponding function is shown in Figure 11. Note that the coefficients are multiplied by the factor 4 along the way. How can we write this function as a sum of a function in  $V_3$

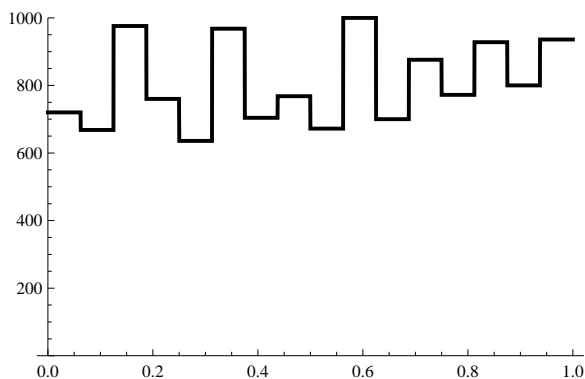


Figure 11: A function in  $V_4$

and a function in  $W_3$ ? Let's start with the component in  $V_3$ . Since for  $k \in \{0, 1, \dots, 7\}$

$$4\phi(16x - 2k) + 4\phi(16x - (2k + 1)) = 2^{1/2} \cdot 2^{3/2}\phi(8x - k), \quad (19)$$

we obtain that the coefficient  $b_k$  of the function in  $V_3$  is given for  $k \in \{0, 1, \dots, 7\}$  by

$$b_k = \frac{a_{2k} + a_{2k+1}}{\sqrt{2}}, \quad (20)$$

where  $a_k$  denotes the  $k$ th coefficient of the function in  $V_4$ . In other words, we obtain the vector representing the function in  $V_3$  by multiplying the vector in (18) by the matrix

$$\begin{pmatrix} \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} \end{pmatrix} \quad (21)$$

In our particular case, the vector (rounded to the nearest integer) representing the function in  $V_3$  is given by

$$(245, 307, 284, 260, 296, 279, 301, 307). \quad (22)$$

Figure 12 shows the function in  $V_4$  and its “blurry” counterpart in  $V_3$ .

What about the component of our function in  $W_3$ ? Since for  $k \in \{0, 1, \dots, 7\}$

$$4\phi(16x - 2k) - 4\phi(16x - (2k + 1)) = 2^{1/2} \cdot 2^{3/2}\psi(8x - k), \quad (23)$$

we obtain that the coefficient  $c_k$  of the function in  $W_3$  is given by

$$c_k = \frac{a_{2k} - a_{2k+1}}{\sqrt{2}}, \quad (24)$$

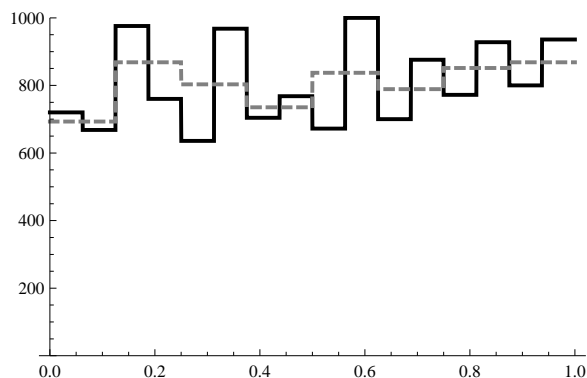


Figure 12: A function in  $V_4$  (black) and its “orthogonal projection” onto  $V_3$  (dashed)

where, again,  $a_k$  denotes the  $k$ th coefficient of the function in  $V_4$ . In other words, this time we obtain the vector representing the function in  $W_3$  by multiplying the vector in (18) by the matrix

$$\begin{pmatrix} \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -\frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -\frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -\frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -\frac{1}{\sqrt{2}} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{1}{\sqrt{2}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & -\frac{1}{\sqrt{2}} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & -\frac{1}{\sqrt{2}} & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \frac{1}{\sqrt{2}} \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & -\frac{1}{\sqrt{2}} \end{pmatrix} \quad (25)$$

In our particular case, the vector (rounded to the nearest integer) representing the function in  $W_3$  is given by

$$(9, 38, -59, -11, -58, -31, -28, -24). \quad (26)$$

Figure 13 shows this as a function in  $W_3$ .

If we are “joining” the vectors in (22) and (26), we obtain

$$(245, 307, 284, 260, 296, 279, 301, 307, 9, 38, -59, -11, -58, -31, -28, -24). \quad (27)$$

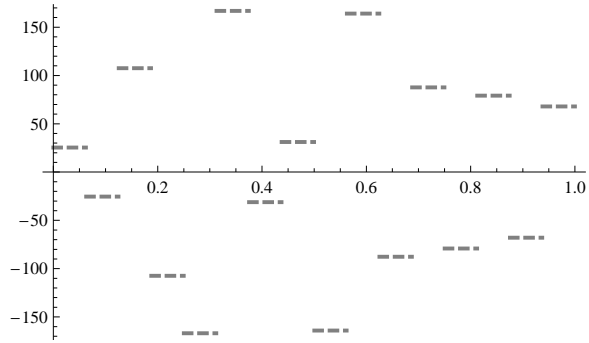


Figure 13: The “orthogonal projection” of our function onto  $W_3$  (dashed)

Since our function in  $V_4$  is the sum of its orthogonal projections onto  $V_3$  and  $W_3$ , we will be able to retrieve the vector in (18) from the vector (27). The cumulative energy plots of both vectors are shown in Figure 14, indicating that the vector in (27) has a higher energy concentration than the original vector (18) and thus may be considered as a compressed version of the vector in (18).

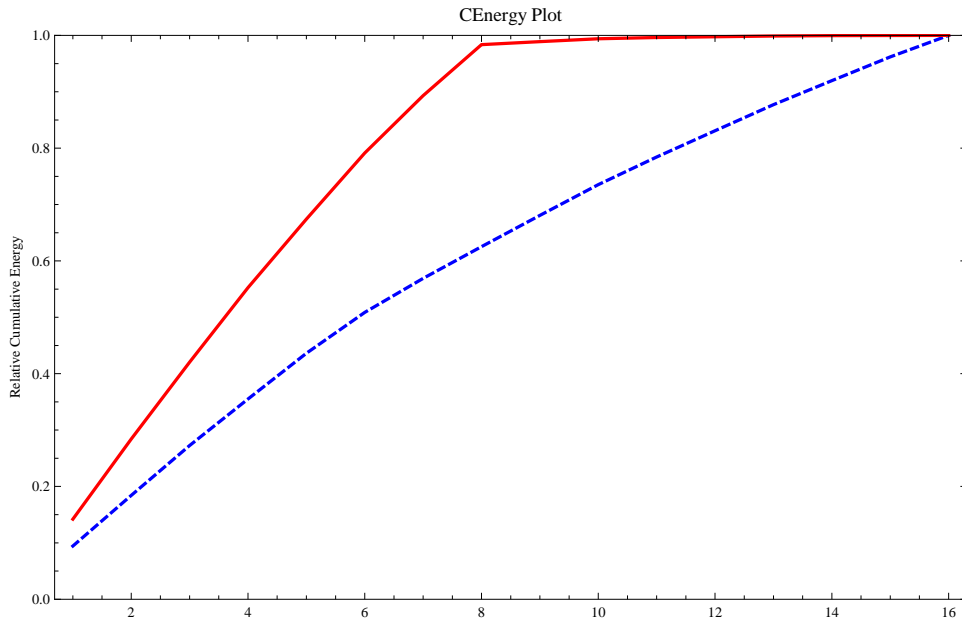


Figure 14: The original vector (18) is shown dashed, while vector (27) is depicted solid.

### Exercise 6

This section has shown how to compute vector (27) from vector (18). Can we reverse the procedure? Suppose our procedure produces as the vector in (27)

$$(200, 350, 351, 130, 115, 215, 122, 308, 15, 35, 47, 23, -12, -32, 67, -23).$$

What does the corresponding original vector (18) look like?

## 7 Concluding Remarks

We have outlined a general procedure: (1) start with a father wavelet  $\phi(x)$ , (2) construct an increasing sequence of vector spaces

$$V_1 \subset V_2 \subset \cdots \subset V_j \subset \cdots,$$

capable of approximating functions in  $L^2([0, 1])$ , (3) construct the corresponding mother wavelet, and (4) ultimately produce a multi-resolution analysis

$$V_j = V_0 \oplus W_0 \oplus W_1 \oplus \cdots \oplus W_{j-1}$$

Our choice for  $\phi(x)$  was the constant 1. As you will see later in the course, in the 1980's other possible candidates emerged.

**Acknowledgment.** This exposition is based on material in *A First Course in Wavelets with Fourier Analysis* by Albert Boggett & Francis J. Narcowich.